



INTERACTION-CONNECT S.A
J-B De Ghellincklaan 23 Box 101
B-9051 Gent, Belgium
www.q-connect.com

info@interaction-connect.com
Tel.: +32 (0)9 380 82 48

KF00492 - Q-Connect Alkaline Battery, E-Block|6LR61|9V

1. Description

The product is manufactured under standard IEC60086-1,2:2015, it is free of mercury and cadmium.


2. Use

Radio, calculator, toy, meter, lighter etc.

3. Chemical system

Zn / KOH / MnO₂

4. Dimensions (mm)

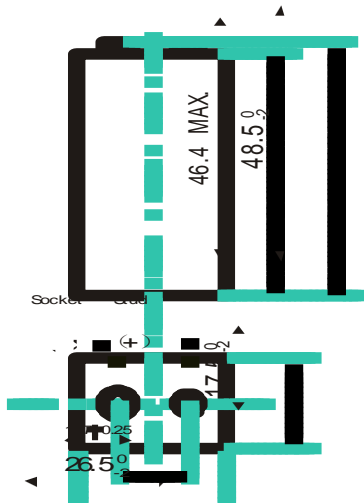

5. Labeling

Aluminum foil jacket

6. Weight

45g

7. Marking

Generally, each battery will be marked the following information: model, trade mark, expiry date, polarity of terminals, nominal voltage and supplier. As a matter of fact, the detail of marking may be varied to meet client's requirements.

8. Appearance and terminals

Appearance and mark shall be clear and intact, there is no distortion, no corrosion, the terminals shall be made and maintain good electrical connection.

9. Nominal voltage

9V



INTERACTION-CONNECT S.A
 J-B De Ghellincklaan 23 Box 101
 B-9051 Gent, Belgium
 www.q-connect.com

info@interaction-connect.com
 Tel.: +32 (0)9 380 82 48

10. Electrical performance

Discharge mode	Off-load voltage(V)		Average duration	Capacity
	standard	test data	Test Data	mAh
180Ω, 24h/d to 4.8V	9.0~9.9	9.35-9.9	14.5h	/
270Ω, 1h/d to 5.4V			20h	550
620Ω, 2h/d to 5.4V			48h	560

Remark: test condition: temperature 20±2°C,RH 45~75%.

11. Leakage proof

At temperature 20 ± 2°C,RH 45~75%,with loading resistance 270 Ω ,continuously discharging to the end point voltage 3.6V,there is no electrolyte ,sealer or other internal component appearing on the outer surface of tested battery.

12. Storage characteristic

Stored under the condition T: 20 ± 2°C,RH 45~75% for 12 months, the capacity of battery is no less than 90% value of fresh one.

13. Shelf life

3 years.

14. The following are a part of packing styles, we are willing to adopt any style in compliance with client's order.

Pack	Inner box (pcs/unit)	Carton box (pcs/unit)
Shrink	10	200
Blister	12	144

15. Warning

Don't recharge, dispose of in fire, put in backwards, mix with used or other tapes, or the battery may leak or explode.